


# Boyser lobe pumps LB-M/125

Industrial pumps and fluid-handling equipment

Performance table

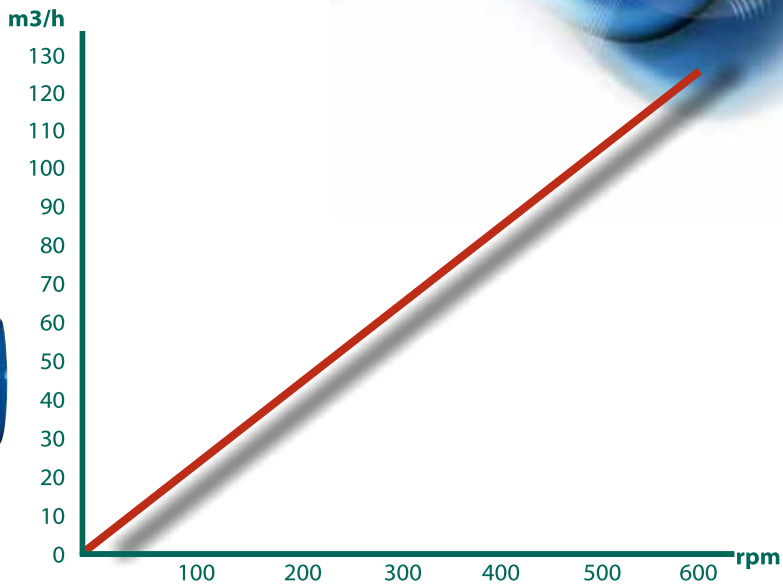

## Technical data LB-M/125

<b>Capacity</b>	3,49 l/rev
<b>Operating pressure</b>	<4 bar
<b>Rubber coated rotors available:</b>	NBR, EPDM, FKM
<b>Metallic rotors available:</b>	AISI-316 , AISI-420
<b>Pump-body material:</b>	AISI-316, AISI-410
<b>Mechanical seals:</b>	Carb. Silicon / Carb. Tungsten, Graphite/Carb. Tungsten.
<b>Standard connections</b>	DIN DN-100 or DN-125 flanges.
<b>Other connections available:</b>	DIN 11851 NW, Tri-clamp, SMS, Fast adapters, ANSI flanges, etc.

