


Boyser lobe pumps LB-M/100

Industrial pumps and fluid-handling equipment



Performance table

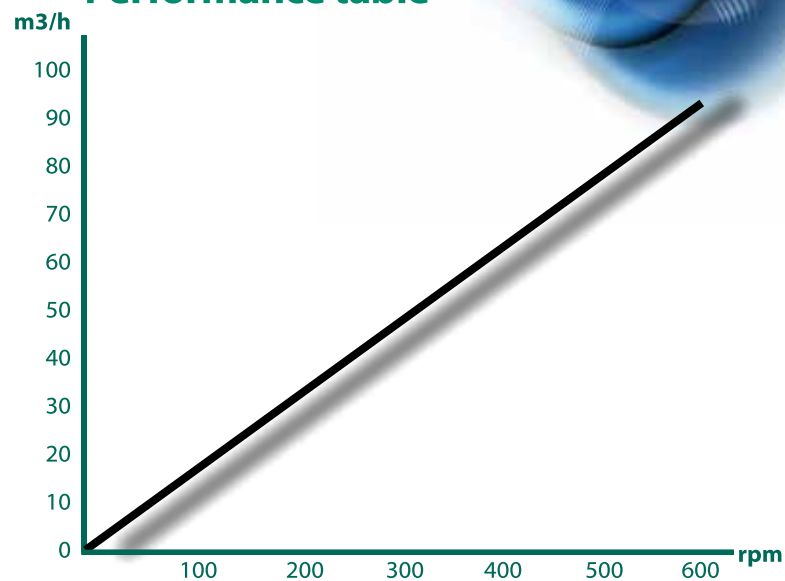

Technical data LB-M/100

Capacity	2,79 l/rev
Operating pressure	<8 bar
Rubber coated rotors available:	NBR, EPDM, FKM
Metallic rotors available:	AISI-316 , AISI-420
Pump-body material:	AISI-316, AISI-410
Mechanical seals:	Carb. Silicon / Carb. Tungsten, Graphite/Carb. Tungsten.
Standard connections	DIN DN-80 or DN-100 flanges
Other connections available:	DIN 11851 NW, Tri-clamp, SMS, Fast adapters, ANSI flanges, etc.

