


FLEXCORE Series

Maximum Flexibility

Case study: Installation on a Tank

Thanks to the unique **modularity of its housing** and the **patented pump insert**, the FLEXCORE pump can adapt easily to any installation position and standard. **That reduces installation costs.** In this case the pump is installed on a tank via a standard conduit tank plate which offers considerable advantages compared to conventional installations.

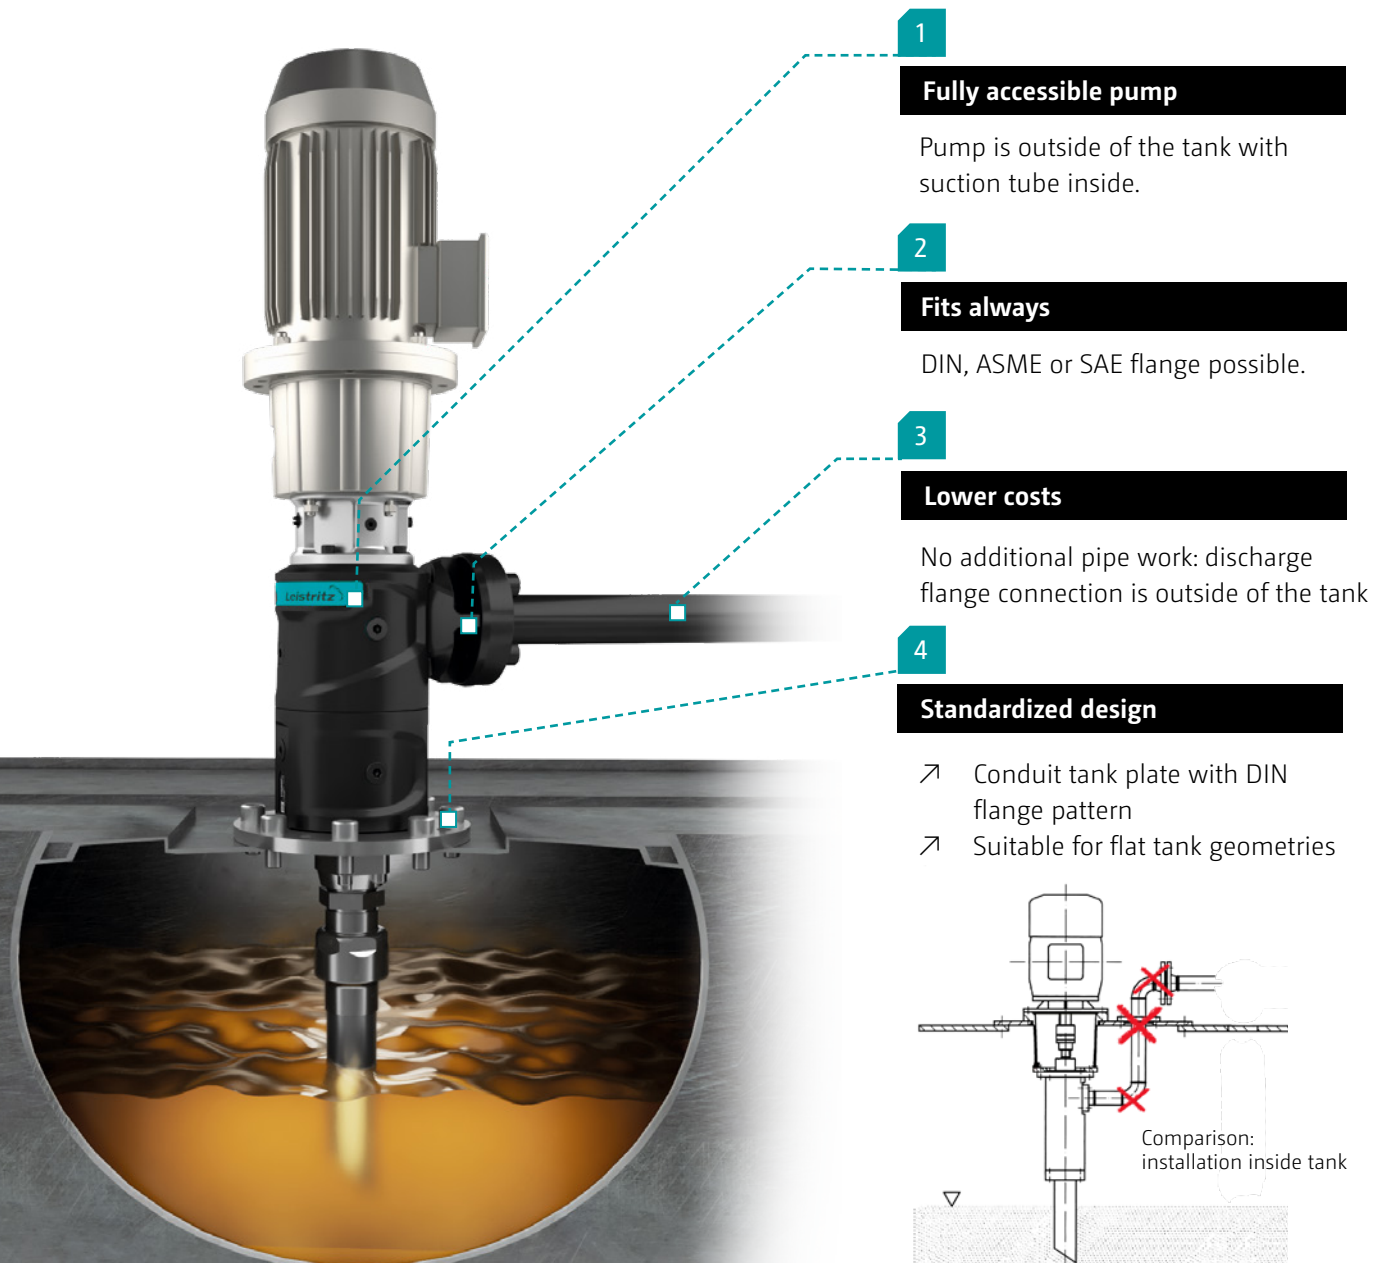

FLEXCORE

For the highest standard.



	FLEXCORE Series
Flow rates	6 flow rate categories between 7 - 564 l/min
Viscosity	1.1 to 2,500 mm ² /s
Operating temperature	-10 to 180 °C
Differential pressure	1 to 40 bar
Suction pressure	max. 8 bar

Made in
Germany

API
compliant

1)

Get advice today



Your contact:

Stefan Franzke
+49 911 4306-9690
flexcore@leistritz.com

Leistritz Pumpen GmbH
Markgrafenstrasse 36-39
90459 Nuremberg
Germany

For more information
and orders
+49 911 4306-9690
flexcore@leistritz.com

Scan the code and
download FLEXCORE
info package
(including CAD data)
flexcore.leistritz.com



¹⁾ according to API deviation list