


As the industry leading manufacturer of reciprocating pumps, **we offer a large array of field-proven, reliable pumps backed by a global technical support team.**

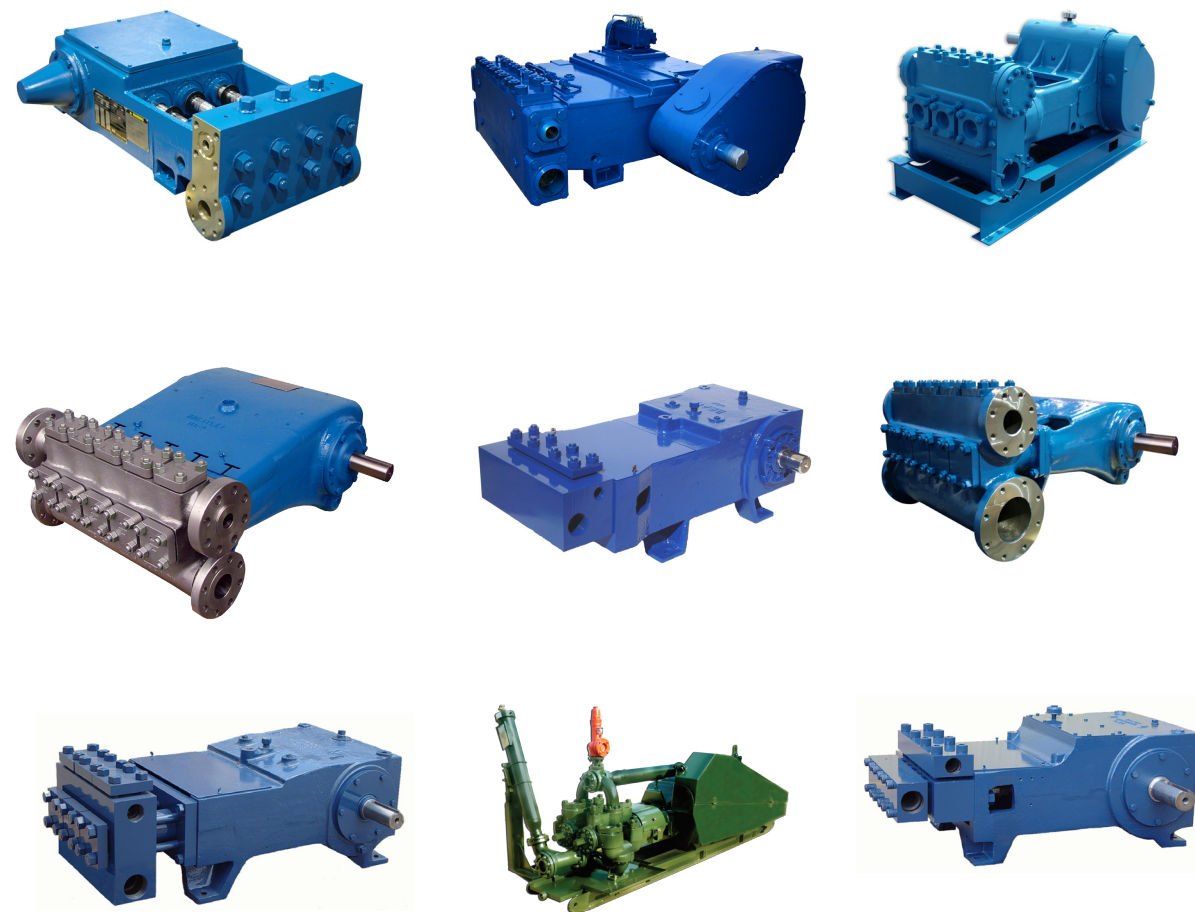

Call 918-447-4600 to find a distributor near you.

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility.

Corporate Headquarters
7909 Parkwood Circle Drive
Houston, Texas 77036
USA

© 2015 National Oilwell Varco | All Rights Reserved
DPF1000007-MKT-001 Rev 01

Reciprocating Pumps



SN TX5231-01

Reciprocating Pumps

As the industry leading manufacturer of reciprocating pumps, we offer a large array of field-proven, reliable pumps backed by a global technical support team. Our product line includes continuous and intermittent duty pumps available in single-acting and double-acting models. With simplex, duplex, triplex, and quintuplex designs, we have an option that can meet your needs in nearly every application.

Single-Acting, Continuous Duty Pumps: Cast Nickel Aluminum Bronze is the most common stocked cylinder. Other metallurgies may be stocked based on market demands. Secondary models include all other metallurgies aside from Cast Nickel Aluminum Bronze. These pumps will typically have a longer lead time.

Rated Horsepower	Pump Model No.			Maximum Displacement			Maximum Pressure			Type	Metallurgy					
	New	Old		Gallons per minute (USGPM)	Liters per second (l/s)	Barrels per Day (BPD)	Cubic Meters per Hour (m ³ /hr)	Pounds per Square Inch (PSI)	Kilopascals (kPa)		CDI Cast Ductile Iron	CBRZ Cast Nickel Aluminum Bronze	CSS Cast Stainless Steel	CSL Cast Carbon Steel	FCSTL Forged Carbon Steel	FSS Forged 15-S Stainless Steel
2	25-1M	P50BLS	4.80	0.30	164	1.08	1,149	7,920		X	X	X	P			
	25-1H	P50B	3.60	0.23	125	0.83	2,042	14,081		X	X	X	P			
	25-3H	P50BH	1.20	0.08	41	0.27	4,595	31,681		X	X	X	P	X	X	
5	55-2L	P50ALS	10.41	0.66	357	2.36	1,149	7,920		X	X	X	P			
	55-2M	P50A	7.97	0.50	274	1.81	2,042	14,081		X	X	X	P			
	55-2H	P50H	2.60	0.16	90	0.59	4,595	31,681		X	X	X	P	X	X	
11	11D-2L	P100ALS	23.80	1.50	816	5.40	1,149	7,920		X	X	P				
	11D-2M	P100A	18.24	1.15	626	4.14	2,042	14,081		X	X	P				
	11D-2H	P100H	5.96	0.38	205	1.35	4,595	31,681		X	X	P	X	X		
22	22T-2L	T225LS	42.70	2.69	1,464	9.69	1,443	9,949		X	X	X	P			
	22T-2M	T225M	32.70	2.06	1,121	7.42	2,565	17,688		X	X	X	P			
	22T-2H	T225H	10.70	0.67	366	2.42	4,660	32,130		X	X	X	P	X	X	
30	30T-2L	J-30-L	51.65	3.26	1,771	11.73	2,000	13,790		X	X	X				
	30T-2H	J-30-H	22.95	1.45	787	5.21	5,000	34,474		X	X	X				
	31Q-2L	5P200A	57.40	3.62	1,968	13.04	2,042	14,081		X	X	P			X	
32	32T-2L	T225LS	42.69	2.69	1,464	9.69	1,443	9,949		X	X	X	P			
	32T-2M	T225M	32.68	2.06	1,121	7.42	2,565	17,688		X	X	X	P			
	32T-2H	T225H	10.67	0.67	366	2.42	4,660	31,716		X	X	X	P	X	X	
55	55T-3H		23.91	1.51	820	5.43	3,300	22,750								
	55T-3L	3364-7	95.62	6.03	3,279	21.72	1,391	9,591		X						
	55T-3SC	3365-SSC	77.46	4.89	2,656	17.59	1,817	12,527		X						
	55T-3LS	3364-6	95.62	6.03	3,279	21.72	1,480	10,204		X		P				
	55T-3M	3364-3	46.86	2.96	1,607	10.64	2,817	19,527		X	X					
59	55T-3MS		46.86	2.96	1,607	10.64	2,473	7,050								
	59T-3L	T365AL	134.90	8.51	4,627	30.65	970	6,686		X	X	P			X	
	59T-3M	T365AM	93.71	5.91	3,213	21.28	2,295	15,825		X	X	P			X	
	59T-3MS	T365MS	33.74	2.13	1,157	7.66	4,789	33,017		X	X	P	X	X		
	59T-3H	T365H	14.99	0.95	515	3.41	10,000	68,948		X	X	P	X	X		
60	60T-3L	J-60-L	137.7	8.69	4,722	31.27	1,500	10,342		X	X	X				
	60T-3M	J-60-M	61.2	3.86	2,099	13.90	3,200	22,063		X	X	X				
	60T-3H	J-60-H	28.95	1.82	992	6.57	5,000	34,474		X	X	X				
80	80T-3L	80T-3L	174.3	11.00	5,976	39.58	2,017	13,906		X		X				
	80T-3M	80T-3M	61.2	3.86	2,099	13.90	4,267	29,420		X	X	X				
	80T-3H	80T-3H	28.9	1.82	992	6.57	5,161	35,584		X		X				
100	100T-4L	J-100-L	209.1	13.19	7,171	47.49	1,659	11,436		X	X	X				
	100T-4M	J-100-M	82.9	5.23	2,843	18.83	3,180	21,925		X	X	X				
	100T-4H	J-100-H	56.2	3.55	1,928	12.77	5,000	34,474		X	X	X				
101	101T-4L	T100-4	209.1	13.2	7,171	47.5	1,220	8,408		X	X	P			X	
	101T-4M	T100-3	114.7	7.2	3,935	26.1	2,744	18,919		X	X	P			X	
	101T-4H	T100-2	48.5	3.1	1,663	11.0	5,378	37,081		X	X	P	X	X	F	
103	103Q-3L	Q3115AL	232.9	14.70	7,987	49.9	970	6,686		X	X	P			X	
	103Q-3M	Q3115AM	161.8	10.21	5,547	36.7	2,295	15,825		X	X	P			X	
	103Q-3MS	Q3115MS	58.2	3.67	1,997	13.2	4,789	33,017		X	X	P	X	X		
	103Q-3H	Q3115H	25.9	1.63	888	5.9	10,000	68,948		X	X	P	X	X		
110	110Q-3L	HP125AL	235.6	14.9	8,079	53.5	1,037	7,149		X		P			X	
	110Q-3M	HP125AM	163.6	10.3	5,610	37.2	2,454	16,922		X		P			X	
	110Q-3MS	HP125MS	58.9	3.7	2,020	13.4	5,121	35,306		X		P	X	X		
	110Q-3H	HP125H	26.2	1.7	898	5.9	10,000	68,948		X		P	X	X		
125	125T-4L	A344-H	293.8	18.5	10,072	66.7	1,500	10,342								
	125T-4M	A334-H	165.2	10.4	5,666	37.5	3,180	21,925		X						
	125T-4H	A324-H	92.9	5.9	3,187	21.1	5,000	34,474		X						
130	130T-4L	130T-4L	241.3	15.2	8,272	54.8	1,750	12,065		X			X			
	130T-4M	130T-4M	103.6	6.5	3,551	23.5	3,111	21,450		X			X			
	130T-4H	130T-4H	56.2	3.5	1,928	12.8	5,000	34,474		X			X			
133	133T-4L	T140-4	209.1	13.2	7,171	47.5	1,440	9,929		X	X	P			X	
	133T-4M	T140-3	114.7	7.2	3,935	26.1	3,600	24,821		X	X	P			X	
	133T-4H	T140-2	48.5	3.1	1,663	11.0	6,000	41,369		X	X	P	X	X	F	
163	163Q-4L	HP165AL	339.8	21.4	11,652	77.2	1,220	8,408		X	X	P			X	
	163Q-4M	HP165AM	186.5	11.8	6,394	42.3	2,744	18,919		X	X	P			X	
	163Q-4H	HP165MS	78.8	5.0	2,792	17.9	5,378	37,081		X	X	P	X	X	F	
165	165T-5L	J-165-L	326.4	20.6	11,191	74.1	1,650	11,376		X	X	X				
	165T-5M	J-165-M	154.3	9.7	5,290	35.0	3,120	21,512		X	X	X				
	165T-5H	J-165-H	81.6	5.1	2,798	18.5	5,000	34,474		X	X	X				

Single-Acting, Continuous Duty Pumps (continued)

Rated Horsepower	Pump Model No.			Maximum Displacement			Maximum Pressure			Type	Metallurgy					
	New	Old		Gallons per minute (USGPM)	Liters per second (l/s)	Barrels per Day (BPD)	Cubic Meters per Hour (m ³ /hr)	Pounds per Square Inch (PSI)	Kilopascals (kPa)		CDI Cast Ductile Iron	CBRZ Cast Ni	CSS Cast Stainless Steel	CSL Cast Carbon Steel	FCSTL Forged Carbon Steel	FSS Forged 15-S Stainless Steel
184	184T-7XL	HP250XL	636.7	40.2	21,832	144.6	728	5,020								
	184T-7L	HP250BL	347.9	21.9	11,927	79.0	1,204	8,299		X	X	P			X	
	184T-7M	HP250BM	203.4	12.8	6,975	46.2	2,912	20,081		X	X	P			X	
	184T-7H	HP250BH	87.0	5.5	2,982	19.7	6,000	41,369		X	X	P			X	
200	200T-5L	J-200-L	326.4	20.6	11,191	74.1	1,680	11,583		X	X	X				
	200T-5M	J-200-M	154.3	9.7	5,290	35.0	3,349	23,097		X	X	X				
	200T-5H	J-200-H	81.6	5.1	2,798	18.5	5,000	34,474		X	X	X				
202	202T-6L	A346-H	353.7	22.3	12,127	80.3	1,500	10,342		X	X					
	202T-6M	A336-H	176.3	11.1	6,045	40.0	3,180	21,925		X	X					
217	217Q-4L	HP200AL	339.8	21.4	11,652	77.2	1,440	9,929		X	X	P			X	
	217Q-4M	HP200AM	186.5	11.8	6,394	42.3	3,600	24,821		X	X	P			X	
	217Q-4H	HP200MS	78.8	5.0	2,702	17.9	6,000	41,369		X	X	P	X	X	F	
250	250T-5L	250T-5L	368.5	23.2	12,634	83.7	1,544	10,646		X	X	X				
	250T-5M	250T-5M	215.5	13.6	7,388	48.9	3,026	20,865		X	X	X				
	250T-5H	250T-5H	103.3	6.5	3,541	23.5	5,000	34,474		X	X	X				
267	267Q-6L	A-546	663.3	41.8	22,741	150.7	1,420	9,791		X						
	267Q-6M	A-536	330.5	20.9	11,331	75.1	3,180	21,925		X						
300	300Q-5L	J-275-L	544.0	34.3	18,651	123.6	1,650	11,376		X	</					